

# 苏州金宝贝五金有限公司

## Suzhou Gemic Hardware Co., Ltd

### NYLON HAMMER PLUG ANCHOR - with nail screw



- \* For fixing of concrete, solid bricks, perforated bricks, hollow blocks.
- \* The fixings are manufactured from the same high grade and quality-monitored polyamide (Nylon) which is also used for the frame fixings with general building inspectorate approval. The material is temperature resistant -40°C to +80°C
- \* For quick and easy installation, High holding power.

#### HEAD STYLES



Countersunk Head



Round Head




Truss Head



Code Number	Anchor Size	Nail Screw	Drill Ø	Min. Drill-Hole Depth With Push-Through Assembly	Plug Length	Qty Box / Ctn (pcs)	Head Style Available
95A05025	5 x 25	3.5 x 28	5	40	25	100 / 3600	Countersunk
95A05030	5 x 30	3.5 x 33	5	40	30	100 / 3600	Countersunk
95A05035	5 x 35	3.5 x 38	5	45	35	100 / 2400	Countersunk
95A05040	5 x 40	3.5 x 43	5	50	40	100 / 2400	Countersunk
95A05045	5 x 45	3.5 x 48	5	55	45	100 / 2400	Countersunk
95A05050	5 x 50	3.5 x 53	5	60	50	100 / 2400	Countersunk
95A06030	6 x 30	4 x 33	6	40	30	100 / 3600	Countersunk, Round
95A06035	6 x 35	4 x 38	6	45	35	100 / 2400	Countersunk, Round
95A06040	6 x 40	4 x 43	6	50	40	100 / 2400	Countersunk, Round
95A06045	6 x 45	4 x 48	6	55	45	100 / 2400	Countersunk, Round
95A06050	6 x 50	4 x 53	6	60	50	100 / 2400	Countersunk, Round
95A06055	6 x 55	4 x 58	6	65	55	100 / 2400	Countersunk, Round
95A06060	6 x 60	4 x 63	6	70	60	100 / 1600	Countersunk, Round
95A06070	6 x 70	4 x 73	6	80	70	100 / 1600	Countersunk, Round
95A06080	6 x 80	4 x 83	6	90	80	100 / 1600	Countersunk, Round
95A06100	6 x 100	4 x 103	6	110	100	100 / 1200	Countersunk
95A08045	8 x 45	5 x 48	8	55	45	100 / 1200	Countersunk, Round
95A08060	8 x 60	5 x 63	8	70	60	100 / 1200	Countersunk, Round
95A08080	8 x 80	5 x 85	8	90	80	100 / 1200	Countersunk, Round
95A08100	8 x 100	5 x 103	8	110	100	100 / 900	Countersunk, Round
95A08120	8 x 120	5 x 123	8	130	120	100 / 900	Countersunk, Round
95A08135	8 x 135	5 x 133	8	145	135	100 / 800	Countersunk, Round
95A08160	8 x 160	5 x 163	8	170	160	50 / 600	Countersunk
95A10080	10 x 80	7 x 83	10	90	80	50 / 900	Countersunk
95A10100	10 x 100	7 x 103	10	105	100	50 / 600	Countersunk
95A10120	10 x 120	7 x 123	10	125	120	50 / 600	Countersunk
95A10135	10 x 135	7 x 138	10	145	135	50 / 600	Countersunk
95A10160	10 x 160	7 x 163	10	170	160	50 / 600	Countersunk

■ Color plug is available

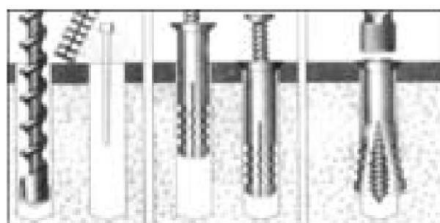

#### INSTALLATION:

- 1 Drill a hole and clean the hole
- 2 Push anchor through fixture into base material until collar is flush with surface
- 3 Hammer drive screw home