
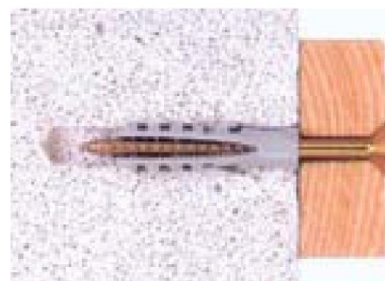
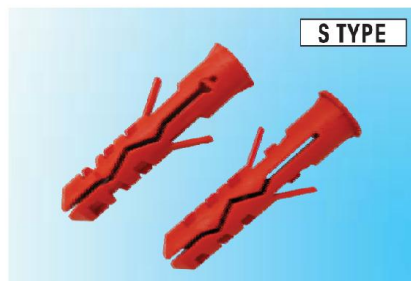


苏州金宝贝五金有限公司

Suzhou Gemic Hardware Co., Ltd

NYLON PLUG ANCHOR (with or without lips)

It is ideal to be used for building materials, even thin. It endures temperature -40°C to +80°C, rust, corrosion, aging and chemical affect. Meanwhile it is good at electric insulation, tensibility and high pressure. The structure designed with gear can prevent itself sliding in the hole.

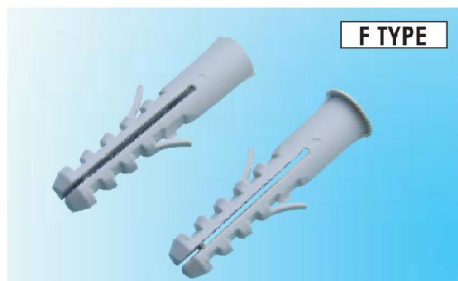

Code No.	Anchor Size	Drill \varnothing	Plug Length	Wood Screw Gauge No.	Wood Screw Size mm	Min Hole Depth	Qty(pcs) Box / Ctn
81A0420	4 x 20	4	20	2 - 4	2 - 3	25	200 / 11200
81A0525	5 x 25	5	25	4 - 8	2.6 - 4	35	200 / 11200
81A0630	6 x 30	6	30	6 - 10	3.5 - 5	40	100 / 5600
81A0730	7 x 30/35	7	30/35	8 - 12	4 - 5.5	40	100 / 4800
81A0840	8 x 40	8	40	10 - 14	4.5 - 6	55	100 / 3600
81A1050	10 x 50	10	50	14 - 18	6 - 8	70	50 / 1800
81A1260	12 x 60	12	60	18 - 24	8 - 10	80	25 / 1000
81A1475	14 x 70/75	14	70/75	24 - 30	10 - 12	90	20 / 500
81A1680	16 x 80	16	80	30 - 36	12 - 14	100	10 / 500
81A2090	20 x 90	20	90	36 - 40	14 - 16	110	10 / 200