


# 苏州金宝贝五金有限公司

Suzhou Gemic Hardware Co., Ltd

## SLEEVE ANCHOR — — — Countersunk head (No.3 Phillips recess)

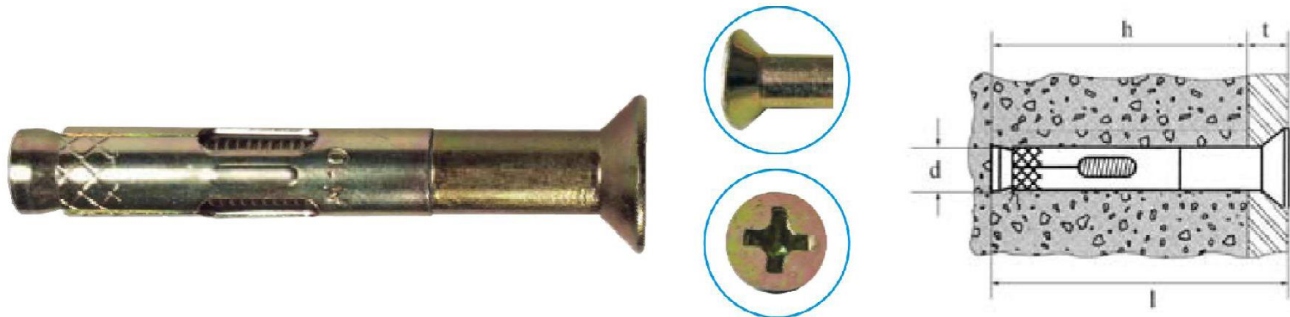

Code No.	Size	Anchor/Hole Diameter d (mm)	Max. Fixture Thickness t (mm)	Min. Hole Depth h (mm)	Anchor Length l (mm)	Quantity Per Box (pcs)
SAC06037	6.5x37 (1/4"x1-1/2")	6.5	12	25	37	100
SAC06055	6.5x55 (1/4"x2")	6.5	25	30	55	100
SAC06075	6.5x75 (1/4"x3")	6.5	45	30	75	100
SAC06100	6.5x100 (1/4"x4")	6.5	70	30	100	100
SAC08060	8x60 (5/16"x2-1/2")	8	25	35	60	50
SAC08085	8x85	8	45	40	85	50
SAC08100	8x100 (5/16"x4")	8	60	40	100	50
SAC10075	10x75 (3/8"x3")	10	30	45	75	50
SAC10102	10x102 (3/8"x4")	10	57	45	102	50
SAC10122	10x122 (3/8"x5")	10	77	45	122	50
SAC10152	10x152 (3/8"x6")	10	107	45	152	25

Coating: Yellow zinc plated, white zinc plated, hot dipper galvanized or mechanical galvanized are available.  
 Material: Common carbon steel (5.8 grade), stainless steel 304 (A2) or stainless steel 316 (A4) is available.  
 Sleeve: Any design sleeve is available. Now we can offer sleeve design "A", "B", "C" in ready moulds.