


苏州金宝贝五金有限公司

Suzhou Gemic Hardware Co., Ltd

SLEEVE ANCHOR — Hex bolt & cone nut & washer & sleeve

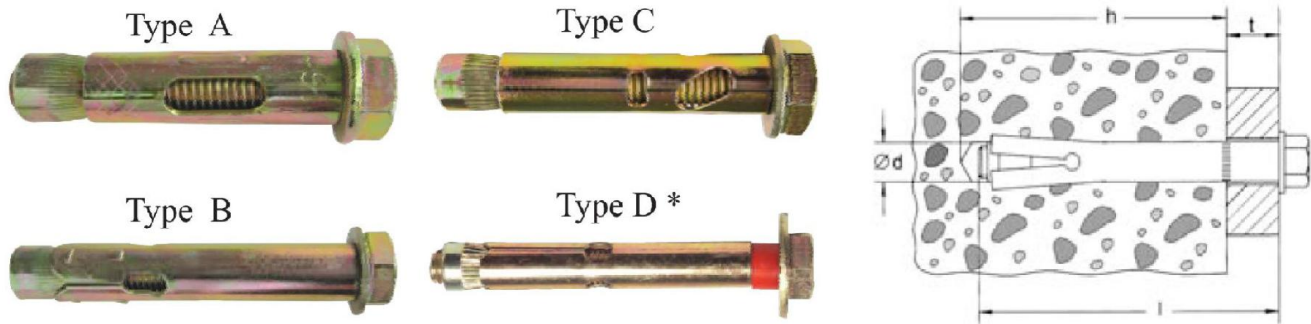

Code No.	Size (INCH IS AVAILABLE)	Anchor/Hole Diameter d (mm)	Max. Fixture Thickness t (mm)	Min. Hole Depth h (mm)	Hexangular Bolt size (4.8 glass)	Quantity Per Box (pcs)	Advisory ** Safe Loading (kN)
SAH08045	8x45	8	5	40	M6x45mm	100	2.1 **
SAH08050	8x50	8	10	40	M6x50mm	100	2.1 **
SAH08060	8x60	8	20	40	M6x60mm	50	2.1 **
SAH08070	8x70	8	30	40	M6x70mm	50	2.1 **
SAH08080	8x80	8	40	40	M6x80mm	50	2.1 **
SAH08090	8x90	8	50	40	M6x90mm	50	2.1 **
SAH08095	8x95	8	55	40	M6x95mm	50	2.1 **
SAH10045	10x45	10	0	45	M8x45mm	50	3.7 **
SAH10055	10x55	10	10	45	M8x55mm	50	3.7 **
SAH10060	10x60	10	15	45	M8x60mm	50	3.7 **
SAH10070	10x70	10	25	45	M8x70mm	50	3.7 **
SAH10080	10x80	10	35	45	M8x80mm	50	3.7 **
SAH10090	10x90	10	45	45	M8x90mm	50	3.7 **
SAH10100	10x100	10	55	45	M8x100mm	50	3.7 **
SAH10120	10x120	10	75	45	M8x120mm	25	3.7 **
SAH11060	11x60	11	10	50	M8x60mm	50	*** **
SAH11070	11x70	11	20	50	M8x70mm	50	*** **
SAH11080	11x80	11	30	50	M8x80mm	50	*** **
SAH11120	11x120	11	70	50	M8x120mm	25	*** **
SAH12065	12x65	12	10	55	M10x65mm	50	5.6 **
SAH12075	12x75	12	20	55	M10x75mm	50	5.6 **
SAH12080	12x80	12	30	55	M10x80mm	50	5.6 **
SAH12090	12x90	12	35	55	M10x90mm	50	5.6 **
SAH12100	12x100	12	45	55	M10x100mm	25	5.6 **
SAH12110	12x110	12	55	55	M10x110mm	25	5.6 **
SAH12120	12x120	12	65	55	M10x120mm	25	5.6 **
SAH12140	12x140	12	85	55	M10x140mm	25	5.6 **
SAH12150	12x150	12	95	55	M10x150mm	25	5.6 **
SAH14075	14x75	14	15	60	M10x75mm	50	*** **
SAH14090	14x90	14	30	60	M10x90mm	25	*** **
SAH14100	14x100	14	40	60	M10x100mm	25	*** **
SAH14120	14x120	14	60	60	M10x120mm	25	*** **
SAH16075	16x75	16	15	60	M12x75mm	10	6.8 **
SAH16110	16x110	16	50	60	M12x110mm	10	6.8 **
SAH16125	16x125	16	65	60	M12x125mm	10	6.8 **
SAH16160	16x160	16	100	60	M12x160mm	10	6.8 **
SAH16170	16x170	16	110	60	M12x170mm	5	6.8 **

Coating: Yellow zinc plated, white zinc plated, hot dipper galvanized or mechanical galvanized are available.

Material: Common carbon steel (5.8 grade), stainless steel 304 (A2) or stainless steel 316 (A4) is available.

Sleeve: Any design sleeve is available. Now we can offer sleeve design "A", "B", "C", "D" in ready moulds.

* The length of the red plastic sleeve can be adjusted according to customer's requirement.

** Loads are for concrete over 20Mpa quality brickwork and some stone.

*** The sleeve is thickened. The Hex bolt is 8.8 glass. It is usually for design "D".