


苏州金宝贝五金有限公司

Suzhou Gemic Hardware Co., Ltd

SLEEVE ANCHOR — — Flange nut & plow bolt & sleeve

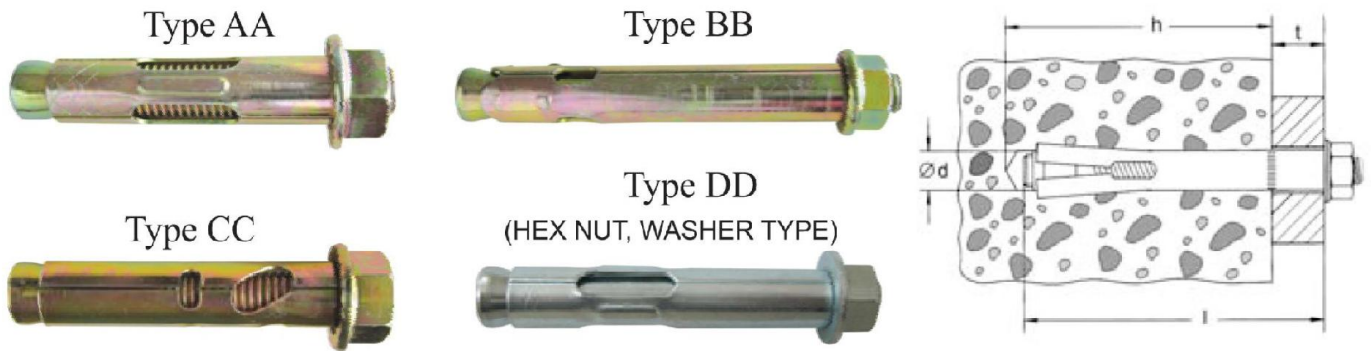

Code No.	Size *	Anchor/Hole Diameter d (mm)	Max. Fixture Thickness t (mm)	Min. Hole Depth h (mm)	Anchor Length l (mm)	Quantity Per Box (pcs)	Advisory ** Safe Loading (kN)
SAF06018	6.5x18 (1/4"x3/4")	6.5 (1/4")	3	15	18 (3/4")	100	1.5 **
SAF06025	6.5x25 (1/4" x 1")	6.5 (1/4")	4	21	25 (1")	100	1.5 **
SAF06036	6.5x36 (1/4" x 1-1/2")	6.5 (1/4")	6	30	36 (1-1/2")	100	1.5 **
SAF06056	6.5x56 (1/4" x 2")	6.5 (1/4")	26	30	56 (2")	100	1.5 **
SAF06075	6.5x75 (1/4" x 3")	6.5 (1/4")	45	30	75 (3")	100	1.5 **
SAF08025	8x25 (5/16" x 1")	8 (5/16")	3	22	25 (1")	100	2.1 **
SAF08040	8x40 (5/16" x 1-1/2")	8 (5/16")	8	32	40 (1-1/2")	50	2.1 **
SAF08065	8x65 (5/16" x 2-1/2")	8 (5/16")	30	35	65 (2-1/2")	50	2.1 **
SAF08085	8x85 (5/16" x 3-1/2")	8 (5/16")	50	35	85 (3-1/2")	50	2.1 **
SAF10040	10x40 (3/8" x 1-1/2")	10 (3/8")	5	35	40 (1-1/2")	50	3.7 **
SAF10050	10x50 (3/8" x 2")	10 (3/8")	10	40	50 (2")	50	3.7 **
SAF10060	10x60 (3/8" x 3")	10 (3/8")	20	40	60 (3")	50	3.7 **
SAF10077	10x77 (3/8" x 3")	10 (3/8")	37	40	77 (3")	50	3.7 **
SAF10097	10x97 (3/8" x 3-3/4")	10 (3/8")	57	40	97 (3-3/4")	50	3.7 **
SAF10125	10x125 (3/8" x 5")	10 (3/8")	85	40	125 (5")	50	3.7 **
SAF12060	12x60 (1/2" x 2-1/2")	12 (1/2")	10	50	60 (2-1/2")	50	5.6 **
SAF12075	12x75 (1/2" x 3")	12 (1/2")	25	50	75 (3")	50	5.6 **
SAF12099	12x99 (1/2" x 4")	12 (1/2")	47	50	99 (4")	25	5.6 **
SAF12129	12x129 (1/2" x 5")	12 (1/2")	77	50	129 (5")	25	5.6 **
SAF16065	16x65 (5/8" x 2-1/2")	16 (5/8")	10	55	65 (2-1/2")	25	6.8 **
SAF16111	16x111 (5/8" x 4-1/2")	16 (5/8")	55	55	111 (4-1/2")	10	6.8 **
SAF16147	16x147 (5/8" x 6")	16 (5/8")	92	55	147 (6")	10	6.8 **
SAF20075	20x75 (3/4" x 3")	20 (3/4")	15	60	75 (3")	10	7.5 **
SAF20107	20x107 (3/4" x 4")	20 (3/4")	45	60	107 (4")	10	7.5 **
SAF20151	20x151 (3/4" x 6")	20 (3/4")	90	60	151 (6")	10	7.5 **
SAF08090	8x90 (5/16" x 3-1/2")	8 (5/16")	55	35	90 (3-1/2")	50	2.1 **
SAF08115	8x115 (5/16" x 4-1/2")	8 (5/16")	75	35	115 (4-1/2")	50	2.1 **
SAF10065	10x65 (3/8" x 2-1/2")	10 (3/8")	35	40	65 (2-1/2")	50	3.7 **
SAF10090	10x90 (3/8" x 3-1/2")	10 (3/8")	50	40	90 (3-1/2")	50	3.7 **
SAF10110	10x110 (3/8" x 4-1/4")	10 (3/8")	70	40	110 (4-1/4")	50	3.7 **
SAF10115	10x115 (3/8" x 4-1/2")	10 (3/8")	75	40	115 (4-1/2")	50	3.7 **
SAF10140	10x140 (3/8" x 5-1/2")	10 (3/8")	100	40	140 (5-1/2")	25	3.7 **
SAF12090	12x90 (1/2" x 3-1/2")	12 (1/2")	40	50	90 (3-1/2")	25	5.6 **
SAF12115	12x115 (1/2" x 4-1/2")	12 (1/2")	65	50	115 (4-1/2")	25	5.6 **
SAF12120	12x120 (1/2" x 4-3/4")	12 (1/2")	70	50	120 (4-3/4")	25	5.6 **
SAF12140	12x140 (1/2" x 5-1/2")	12 (1/2")	90	50	140 (5-1/2")	25	5.6 **
SAF12150	12x150 (1/2" x 5-7/8")	12 (1/2")	100	50	150 (5-7/8")	25	5.6 **
SAF16095	16x95 (5/8" x 3-1/2")	16 (5/8")	40	55	95 (3-1/2")	10	6.8 **
SAF16125	16x125 (5/8" x 5")	16 (5/8")	70	55	125 (5")	10	6.8 **
SAF16170	16x170 (5/8" x 6-3/4")	16 (5/8")	110	60	170 (6-3/4")	10	6.8 **
SAF20100	20x100 (3/4" x 4")	20 (3/4")	35	60	100 (4")	10	7.5 **
SAF20160	20x160 (3/4" x 6-1/4")	20 (3/4")	100	60	160 (6-1/4")	10	7.5 **
SAF20180	20x180 (3/4" x 7-1/8")	20 (3/4")	110	60	180 (7-1/8")	5	7.5 **
SAF20200	20x200 (3/4" x 7-7/8")	20 (3/4")	130	70	200 (7-7/8")	5	7.5 **

Coating: Yellow zinc plated, white zinc plated, hot dipper galvanized or mechanical galvanized are available.
 Material: Common carbon steel (5.8 grade), stainless steel 304 (A2) or stainless steel 316 (A4) is available.
 Sleeve: Any design sleeve is available. Now we can offer sleeve design "AA", "BB", "CC", "DD" in ready moulds.
 * The size/thread also can be in BS or UNC.
 ** Loads are for concrete over 20Mpa quality brickwork and some stone.

Gemic Hardware

Add: Room 908 Block A, No.168 Xiangcheng Avenue, Suzhou, China

Tel: 0086-512-69599006

Fax: 0086-512-69599001

URL: www.screw-anchor.com

E-mail: info@screw-anchor.com